

SS-206 BUILT IN FOOD WARMER



SS-206

Accessories / Options

Adapter Top, to convert SS-206 to hold two 7-quart insets, 20176

Adapter Top, to convert SS-206 to hold two 4-quart insets and two 2 1/2-quart insets, 20434

Adapter Top, to convert SS-206 to hold one 7-quart and one 11-quart inset, 21621

Adapter Top, to convert SS-206 to hold three 4-quart insets, 21615

Adapter Top, to convert SS-206 to hold four 2 1/2-quart insets, 21624

Adapter Top, to convert SS-206 to hold one 4-quart and one 7-quart inset, 21617

Inset, 2 1/2-quart capacity with lid, 20773

Inset, 4-quart capacity with lid, 20774

Inset, 7-quart capacity with lid, 20587

Inset, 11-quart capacity with lid, 20908

Individual drain (D) models available

Drain Valve Extension Kit, extension from drain to counter front with remote handle, for use with "D" models only, 20385

Wells SS-206 Built-In Rectangular Food Warmer is designed for top mount installation. The warming pan is heavy-duty stainless steel and is available with or without a drain. The well accommodates a standard 12" x 20" inset pan up to six inches deep.

Features

- **12" x 20" standard warming pan** easily adapts to a variety of fractional or round inset pans up to 6" deep.
- **The tubular element**, located under the warming pan, allows for quick heating.
- Warmer has a **high-limit thermostat**, which prevents unit from overheating.
- **Infinite control** is housed in a remote, oval panel with a guard ring to help prevent accidental temperature changes.
- **Warming pan is deep-drawn, stainless steel** for maximum strength and durability.
- Models are available with **optional drain (D)**.
- **Wellslok** allows for quick and easy installation in stainless steel countertops.
- Warmer is designed for **wet or dry operation**.
- **The SS-206 Warmer** is Underwriters Laboratories, Inc. Recognized and meets NSF International standards.
- **A one-year warranty** against defects covers parts and labor.

Specifications

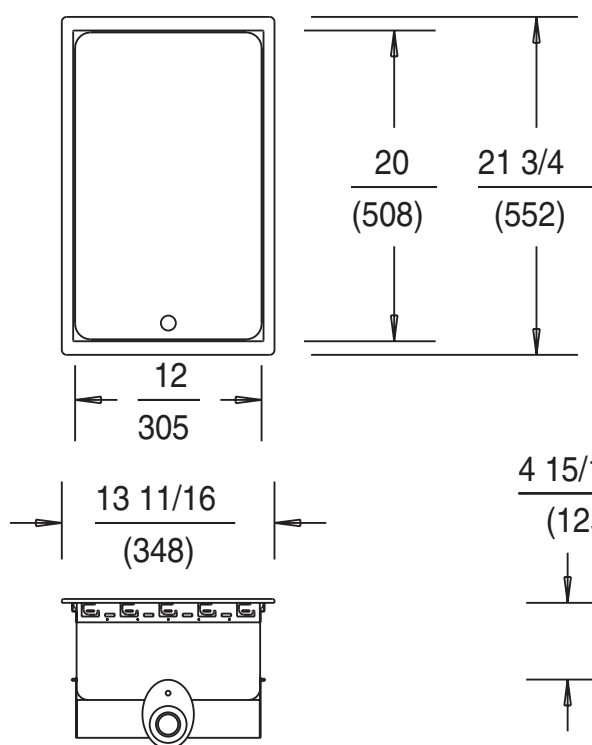
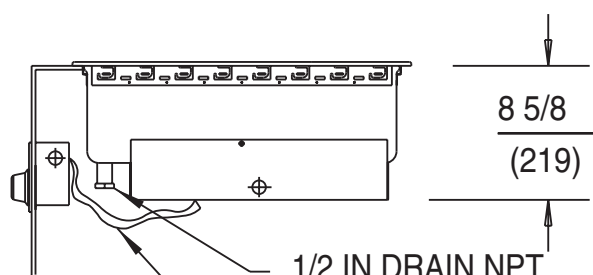

Overall Dimensions:		Inches	MM
Width		13 11/16	348
Depth		21 3/4	552
Temperature Settings:		OFF/LO to HI	
Weights:		Lbs.	KG
Installed		19	9
Shipping		21	10





MODEL SS-206 BUILT-IN RECTANGULAR FOOD WARMER

DIMENSIONS:

INCH
(MM)

4 15/16
(125)

1/2 IN DRAIN NPT
SS-206D ONLY

POWER SUPPLY LEADS

SUGGESTED CLEARANCE FROM UNIT TO THE NEAREST SURFACE			
BACK	SIDE	BOTTOM	FRONT*
2 (51)	2 (51)	6 3/4 (171)	4 1/8 (105)

* When control box is located below the unit, front clearance can be 2 inches.

NOTE: Depending on the installation, clearances can be reduced upon further evaluations to UL standards.

SS-206 ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS	PHASE	POWER SUPPLY CORD
SS-206	120	1200	10.0	SINGLE	NONE
SS-206	208	900	4.3	SINGLE	NONE
SS-206	240	1200	5.0	SINGLE	NONE

All models with an 'D' suffix have the same electrical specifications as the standard models.

NOTE: Specifications are subject to change without notice. See installation instructions prior to installing the unit. This document is not for installation purposes. The installation of recognized component units requires additional evaluations to Underwriters Laboratories, Inc. standards.

THIS UNIT IS DESIGNED TO BE INSTALLED IN METAL COUNTERS ONLY.

